

机床核心功能部件 五轴双摆头

承接非标定制
Special design for your need





帝造精彩 奥行无止




苏州帝奥卡精密科技有限公司
Suzhou Diooka Precision Technology CO., Ltd.
地址：苏州市虎丘区嵩山路206号1号楼
网址：www.diooka.com
电话：15151555445 13404218078




RDAF630 强力液压刹车 Multiple powerful hydraulic clamping system

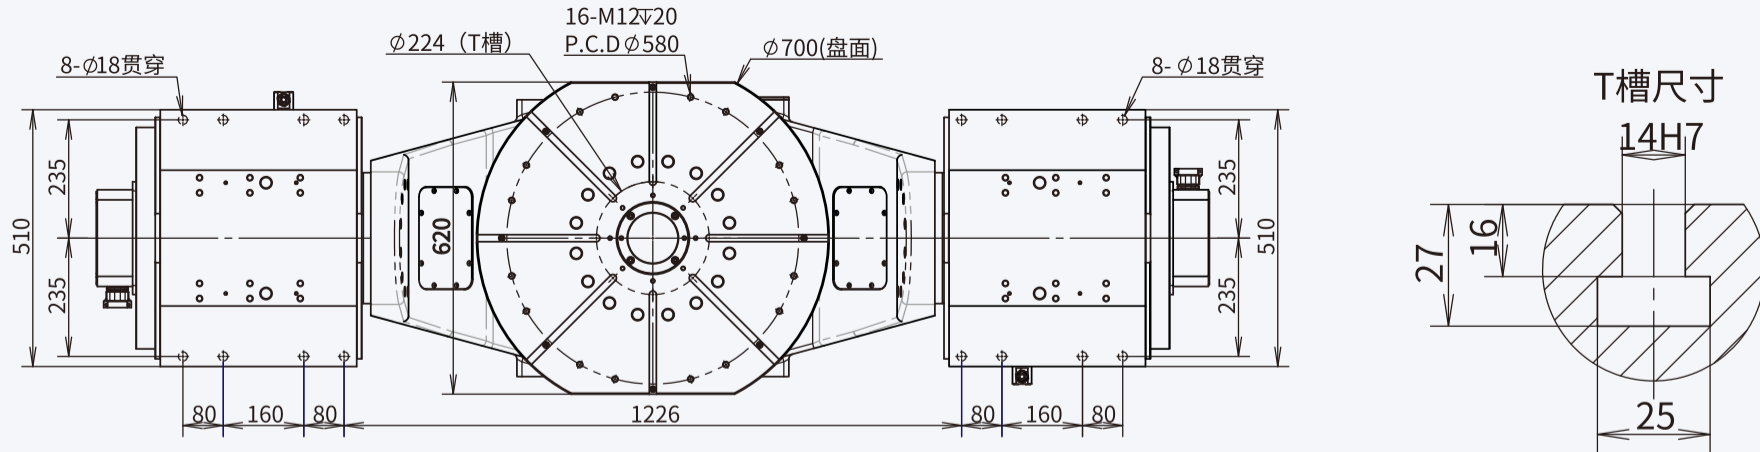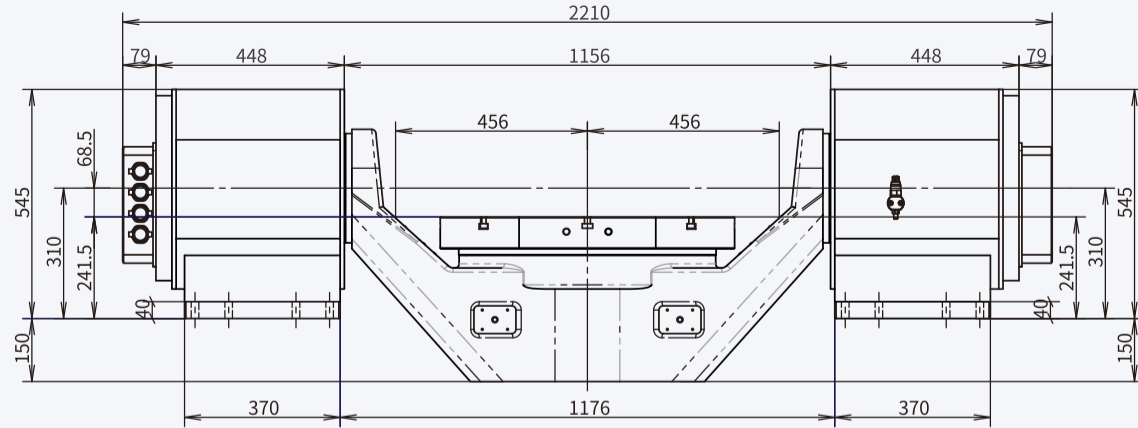


RDAF800 强力液压刹车 Multiple powerful hydraulic clamping system

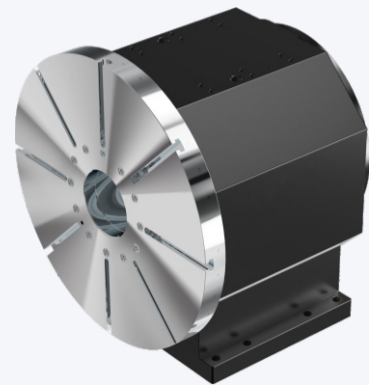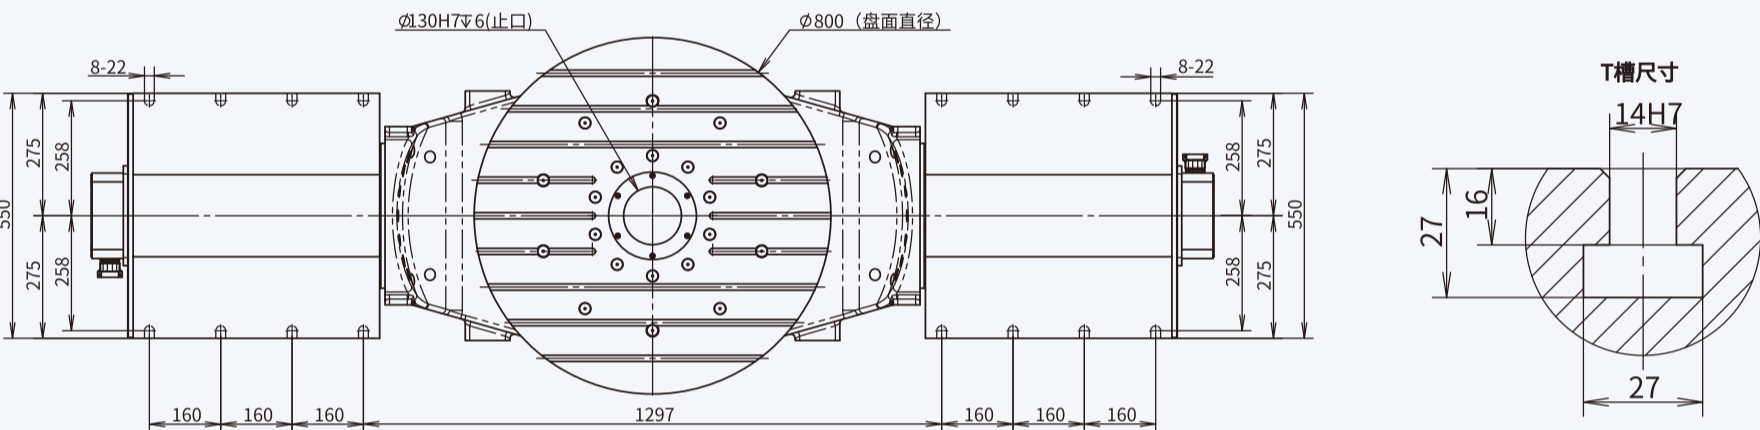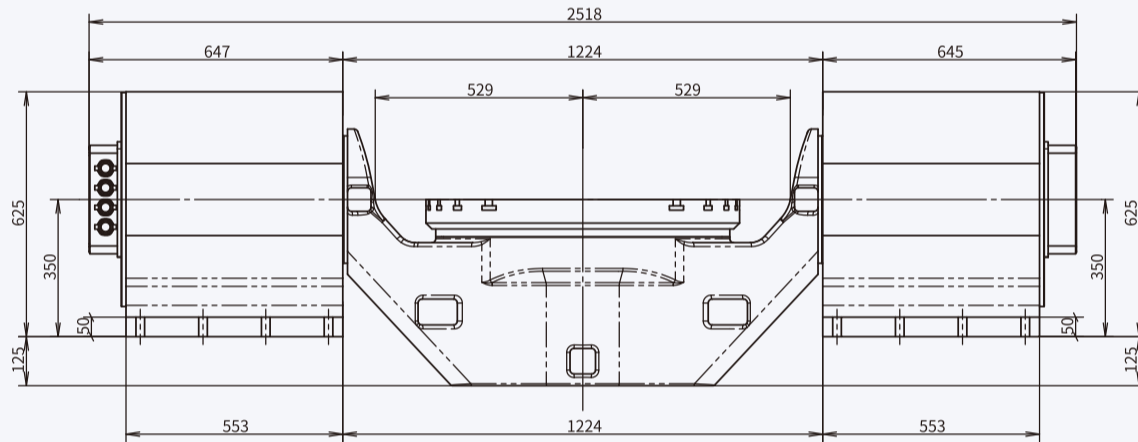

直驱立式转台
DDR系列

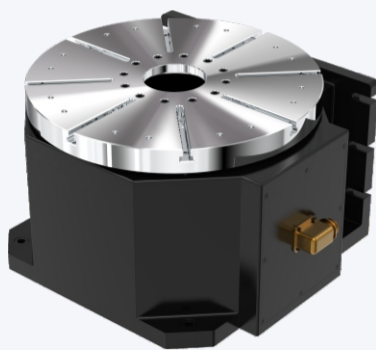

直驱卧式转台
DDS系列

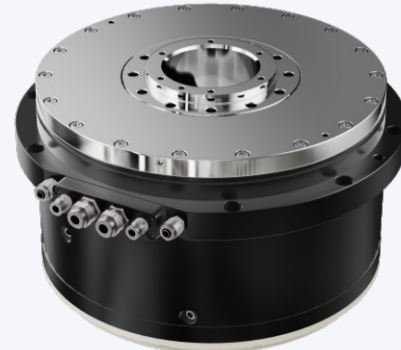

直驱动力模组
DDT系列



直驱单臂五轴
DDAS系列




直驱摇篮式五轴
RDAF系列



帝奥卡直驱式转台 Direct-Drive Rotary Tables

电机核心技术
CORE MOTOR TECHNOLOGY

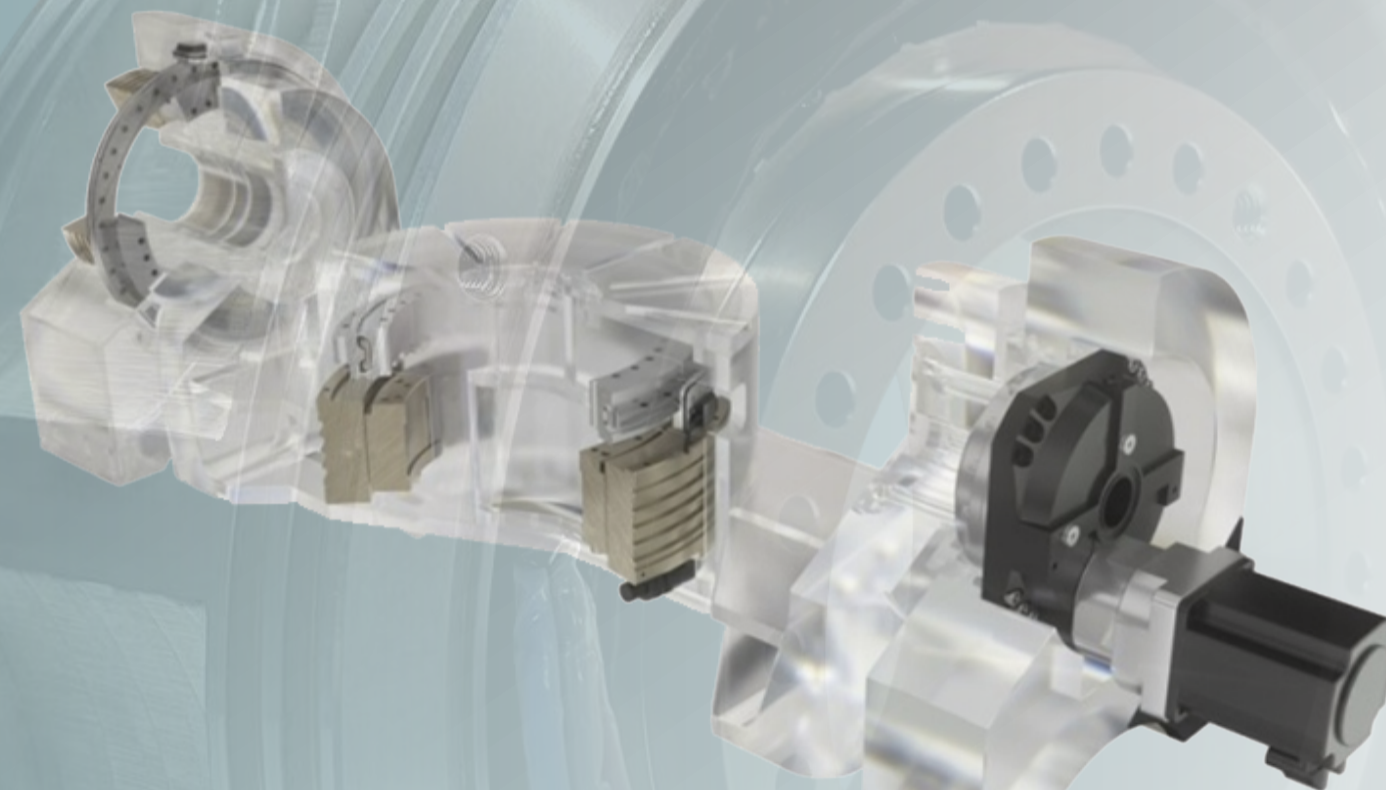

苏州帝奥卡精密科技有限公司

序号 No.	型号 Model	盘面直径 Diameter of table(mm)	旋转轴转速 Rotary axis speed	冷却方式 Cooling method	旋转轴C轴 Rotary axis				倾斜轴A轴 Tilting axis			容许工件负载 Allowable work load(kgs)	分割精度 Indexing accuracy(sec)	重复精度 Repeatability accuracy (sec)	制品重量 Net weight(kgs)
					连续扭矩 Continuous torque(N.m)	峰值扭矩 Peak torque(N.m)	锁紧扭矩 Clamping torque(N.m)	允许转最高速 Max. allowable speed(Rpm)	连续扭矩 Continuous torque(N.m)	峰值扭矩 Peak torque(N.m)	锁紧扭矩 Clamping torque(N.m)				
1	DAF170/170-S15	Ø170	标准/高转速	自然冷却Self-cooled	28	112	300	150/1500	60	240	1000	80/30	±2.5	2	192.5
2	DAF260/260-S15	Ø260	标准/高转速	水冷water cooling	105	184	310	150/1500	200	400	1200	160/100	±2.5	2	269.5
3	DAF320/320-S10	Ø320	标准/高转速	水冷water cooling	120/118	240	500	150/1000	302	620	2000	250/180	±2.5	2	386
4	DAF400/400-S10	Ø400	标准/高转速	水冷water cooling	302/200	620/300	1000	60/1000	650	1228	2000	300/200	±2.5	2	606.5
5	RDAF630/630-S03	Ø700X620	标准/高转速	水冷water cooling	800/670	1900/1350	3500	50/300	986X2	2180X2	3500X2	850/600	±2.5	2	1450
6	RDAF800	Ø800	标准转速	水冷water cooling	2880	4200	4500	50	2700X2	5900X2	4500X2	1400	±2.5	2	2500
7	编码器选项 Encoder type compatible	通用GT 海德汉HEIDENHAIN 尼德科Nidec 雷尼绍RENISHAW													

直驱转台优势

Advantages of Direct-Drive rotary tables

高转速、高加/减速、高动态响应

High rotational speed, high acc./dec. speed, high dynamic response

带自锁断电保护、带水冷电机

Equipped with self-locking power off protection and water-cooled motor

无背隙、零磨损、免维护、精度保持性好

No backlash, zero wear, maintenance free, super durability accuracy

双活塞倍力气压刹车、超大刹车扭矩


Multiple powerful pneumatic clamping system, super brake torque

液压锁紧系统，满足更大力矩要求

Powerful hydraulic clamping system to meet greater torque requirement





极限定位精度、重复定位精度、可任意角度定位

Super-indexing accuracy, excellent repeatability accuracy, positioned at any angle

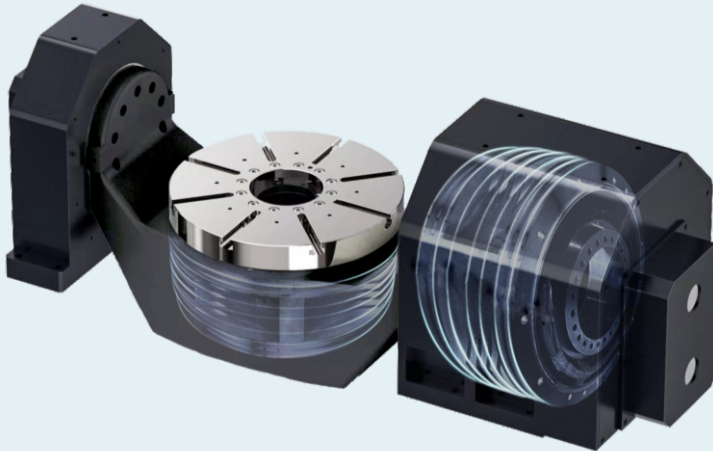




DAF170 强力气压刹车

Multiple powerful pneumatic clamping system

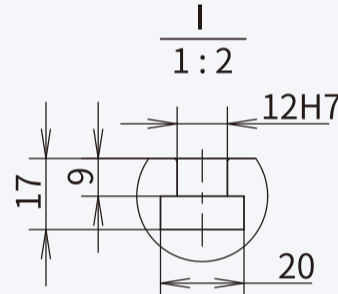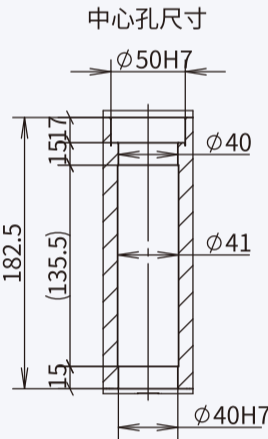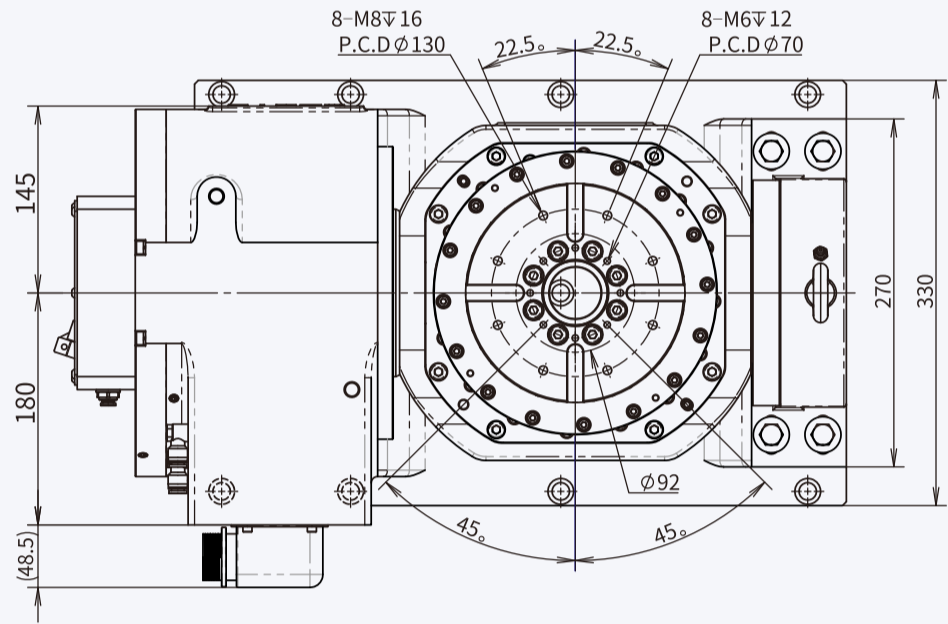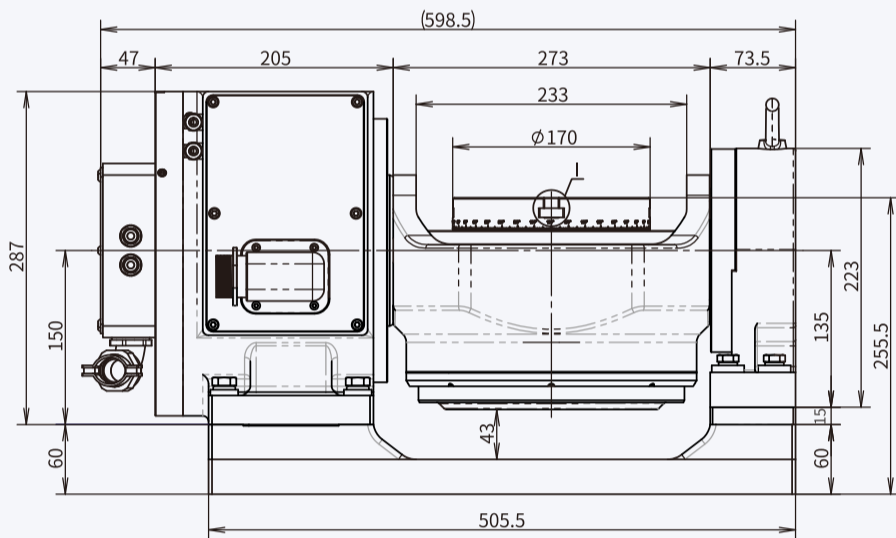





DAF320 强力气压刹车

Multiple powerful pneumatic clamping system

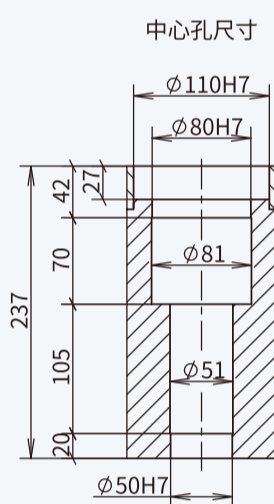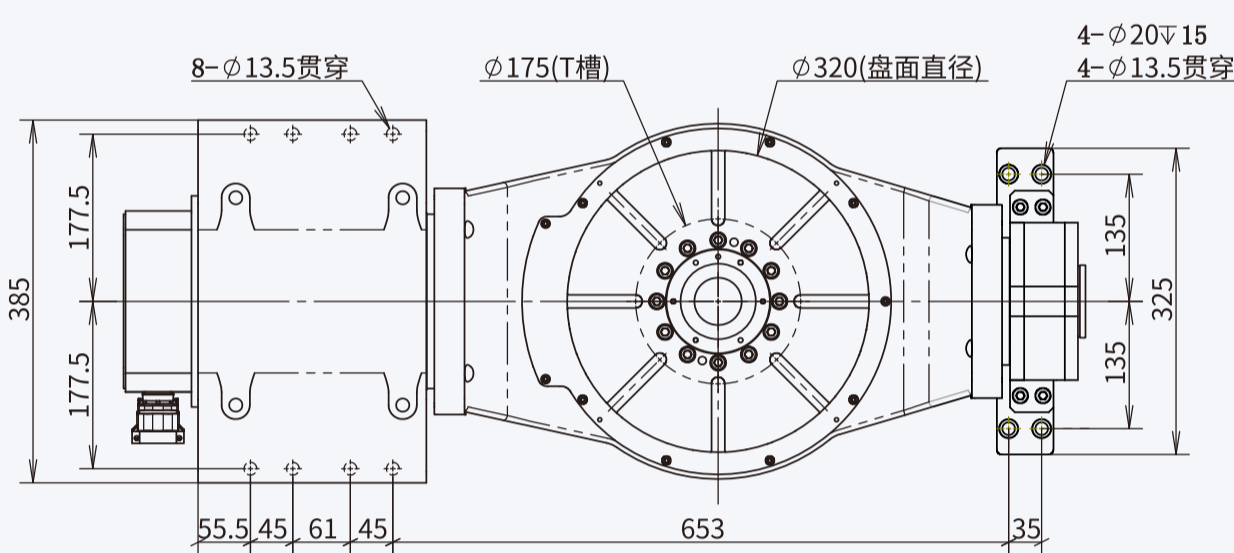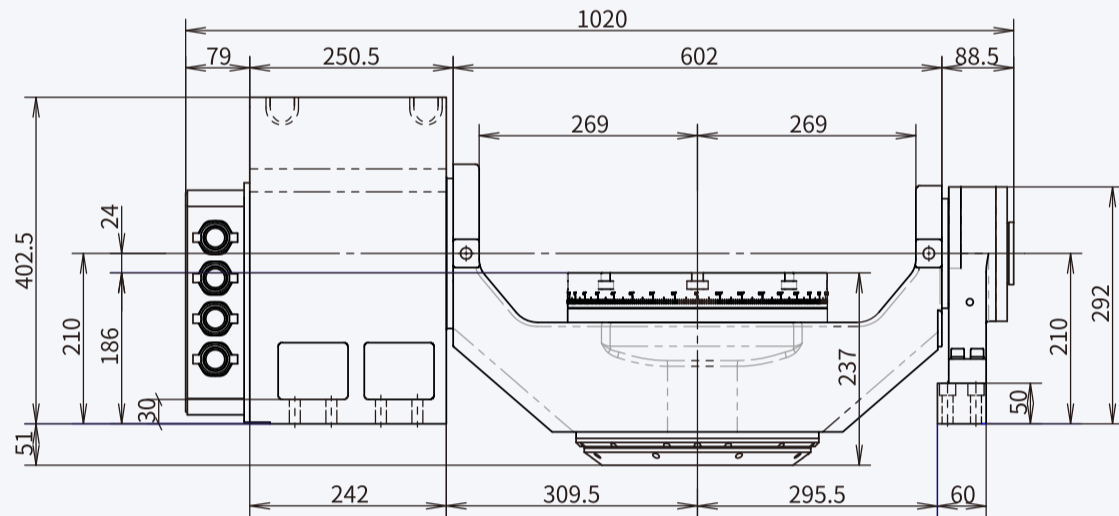

DAF260 强力气压刹车

Multiple powerful pneumatic clamping system

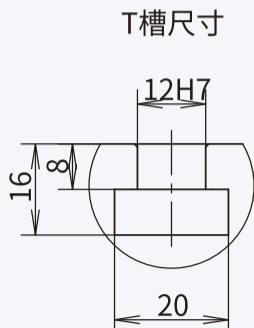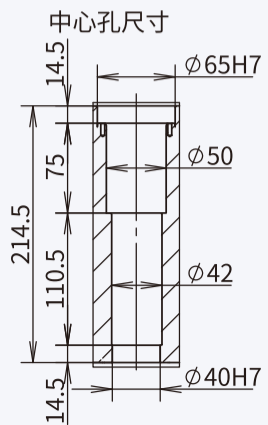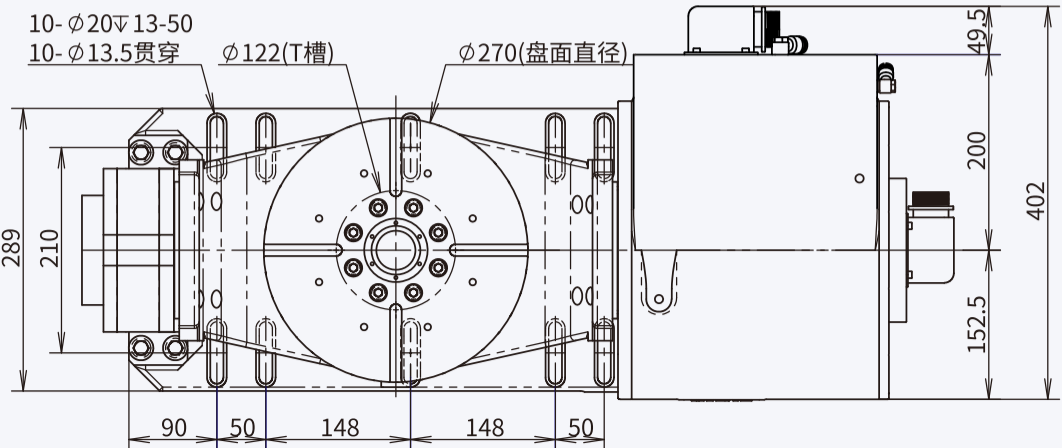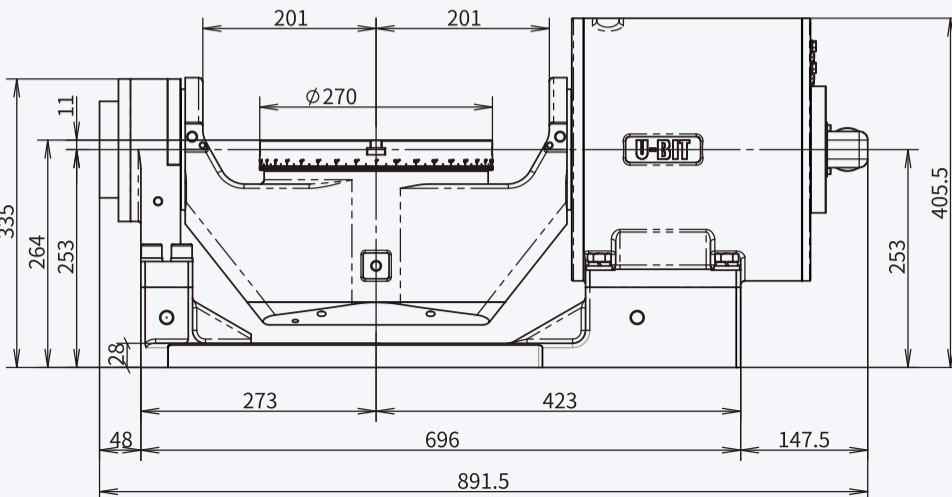

DAF400 强力气压刹车

Multiple powerful pneumatic clamping system

